

ProxKey® II Fob

125 kHz Proximity

Proximity Keyfob • 1346



ACCESS reliability.


Application

The RF-programmable ProxKey® II proximity keyfob incorporates proximity technology into a convenient device approximately the size of an automotive key.

Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides an external number for easy identification and control.
- ▶ Can be placed on a key ring for convenient entry.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Using HID's ProxProgrammer®, card vendors can ship proximity keyfobs, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

- Proven, Reliable Technology** Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- Small and Convenient** Can be carried with keys in pocket or handbag.
- Cross-reference** A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
- Security** Offers over 137 billion unique codes.
- Long Life** Passive, no-battery design allows for an infinite number of reads.
- Durability** Strong, flexible and resistant to cracking and breaking.
- Warranty** Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

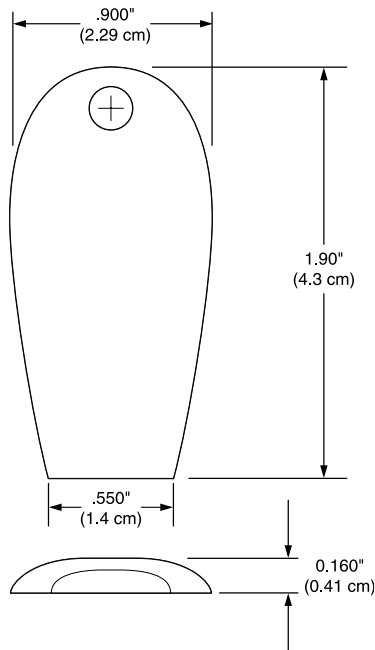

Typical Maximum* Read Range
 ProxPoint® Plus reader-up to 1.5" (3.7 cm)
 MiniProx™ reader-up to 2" (5 cm)
 ThinLine® II reader-up to 2" (5 cm)
 ProxPro® reader-up to 3" (7.5 cm)
 ProxPro® II reader-up to 4" (10.2 cm)
 Prox80™-up to 2" (5.1 cm)
 MaxiProx® reader-up to 12" (28 cm)
 *Dependent on local installation conditions.

Dimensions
 1.90" x 0.900" x 0.550"
 (4.3 x 2.29 x 1.4 cm)

Keyfob Construction
 Ultrasonically welded, ABS shell

Operating Temperature
 -50° to 160° F (-45° to 70° C)

Weight
 0.26 oz. (7.4 gm)


Part Number
 Base Part No. 1346

Description
 RF-programmable, 125 kHz, charcoal gray, customer-specified ID Numbers, key ring included.

Options
 • External card numbering (inkjet or laser engraving)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007



MKT-PROXKEYii_DS_EN



ACCESS experience.

hidcorp.com

HID Global Offices:

Corporate North America
 9292 Jeronimo Road
 Irvine, CA 92618-1905
 U.S.A.
 Phone: (800) 237-7769
 Phone: (949) 598-1600
 Fax: (949) 598-1690

Asia Pacific
 19/F 625 King's Road
 North Point
 Island East
 Hong Kong
 Phone: +852 3160-9800
 Fax: +852 3160-4809

Latin America
 Circunvalacion Ote. #201 B
 Despacho 2
 Col. Jardines del Moral
 Leon 37160, Gto.
 Mexico
 Phone: +52 477 779 1492
 Fax: +52 477 779 1493

Europe, Middle East & Africa
 Homefield Road
 Haverhill, Suffolk
 CB9 8QP
 England
 Phone: +44 (0) 1440 714 850
 Fax: +44 (0) 1440 714 840